JOHNSON®
MARBLE&QUARTZ
NATURE, REINVENTED

Corporate Office: 7th floor, Windsor, C.S.T. Road, Kalina, Santacruz (East), Mumbai - 400 098, India.
Tel : +91-22-3064 7300, 2654 7300, Fax: 3064 7400.
CustomerCare: 022 - 3064 7484, 1800-22-7484 (from BSNL and MTNL lines)

Registered Office: 305, Laxmi Niwas Apartments,Ameerpet, Hyderabad -500 016, India.
CIN: L26942AP1992PLC014033
JMQ Helpline: 022-3064 7505
Email: customercare@hrjohnsonindia.com; info@jmq.com Website: www.johnsonmarblequartz.in

www.youtube.com/hrjohnsonindia1 www.twitter.com/hrjohnsonindia www.facebook.com/hrjindia

Scan the QR code to visit our website.

JMQ (ABRO)/Apr'15

THE WONDERS OF NATURE.
MADE MORE ADVANCED.

JOHNSON®
MARBLE&QUARTZ
NATURE, REINVENTED

WE ARE ALWAYS AIMING
FOR SOMETHING HIGHER.

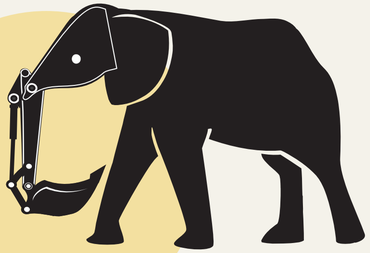

THE GIANT OF HOME STYLING. WITH AN EDGE.

APPLICATION OF ADHESIVE AND INSTALLATION:

- Spread the adhesive on the wall/floor surface at a thickness of 2-6mm, using a suitable steel notch trowel.
- Press the slab firmly into position with a slight twisting action and use a suitable rubber mallet for gentle tamping.
- Depending on the span, it is recommended to provide expansion joints of minimum 3-5 mm at regular intervals during the installation to facilitate thermal expansion. Spacers of suitable thickness may be used followed by the installation of flexible polyurethane sealant of Ardex Endura (India) Pvt. Ltd. or an equivalent product.
- A gap of minimum 8-10mm should be kept around the perimeter (under skirting) of laid marble/quartz flooring.
- Suitable support should be provided during the initial setting time to ensure proper adhesion to substrate.

NOTE: In all cases, please follow the instructions of usage (user manual) printed on adhesive bags.

GROUTING:

- **Do not use cement/mortar/POP for grouting as these are alkaline.** The reaction may cause patches on joints. Always use epoxy resin based grouts. Grouting can be carried out after 4-5 days of installation. The company recommends grouts from Ardex Endura (India) Pvt. Ltd. or any other equivalent epoxy resin based grouts.

CLEANING AND MAINTENANCE:

- DO use only neutral detergents for frequent or regular cleaning.
- DO clean surfaces ONLY with a neutral stone cleaner. Acetone may be used with care to remove spots or stains, if any.
- For further information on cleaners, please consult Ardex Endura (India) Pvt. Ltd.

Disclaimer: Due to print limitations and variations in natural aggregates used as raw materials, colours & patterns given in brochure are to be used only for reference. It is recommended that current physical sample along with stock availability is checked prior to placing order. Johnson Marble & Quartz reserves the right to change or modify its range of products and dimensions based on design discontinuation due to changing tastes & trends or technical & production requirements without any advance notice. Company absolves itself of any responsibility due to complaints arising from improper handling, storage, installation or usage of its products other than what it is intended for.